

5557 连接器系列

5557 Series

技术参数 Specifications

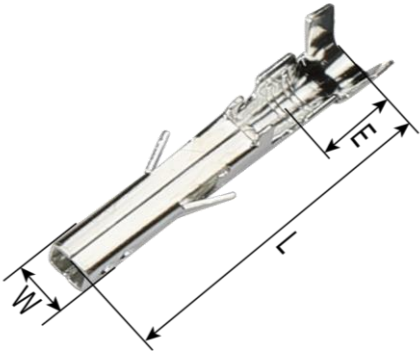
使用线数(Hole count): 2 4 6 8 10 12 14 16 18 20 22 24

温度范围 (Temperature range): -25℃~85℃

额定电压 (Rated voltage):300V. AC/DC

额定电流 (Rated current): 8A

A

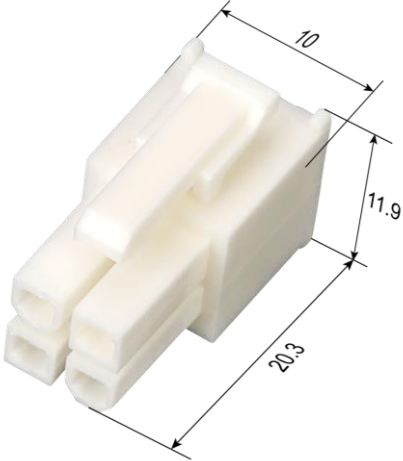
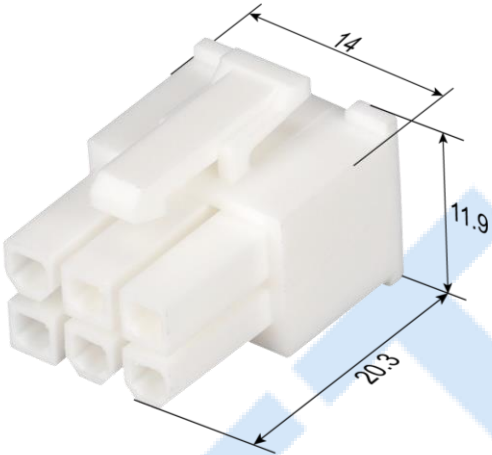
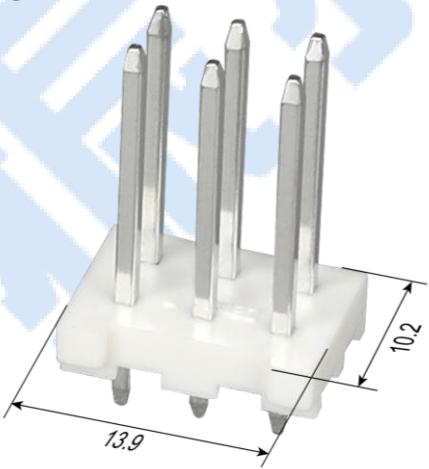
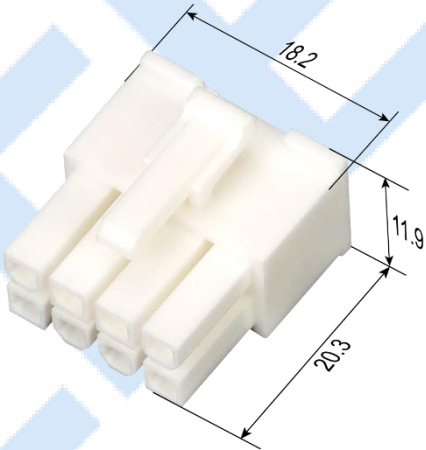
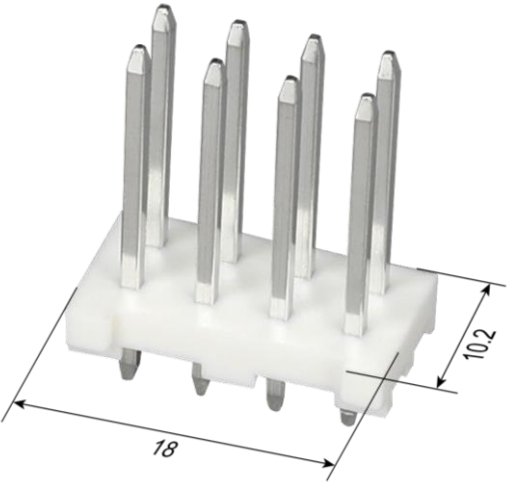


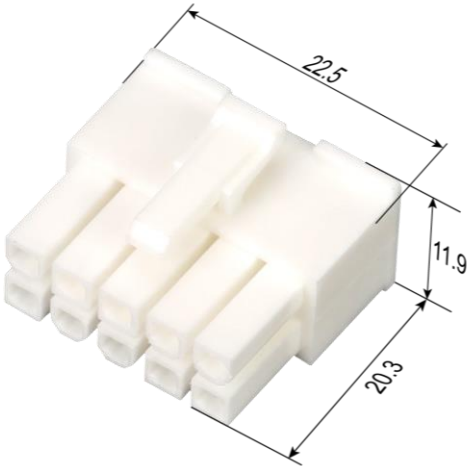
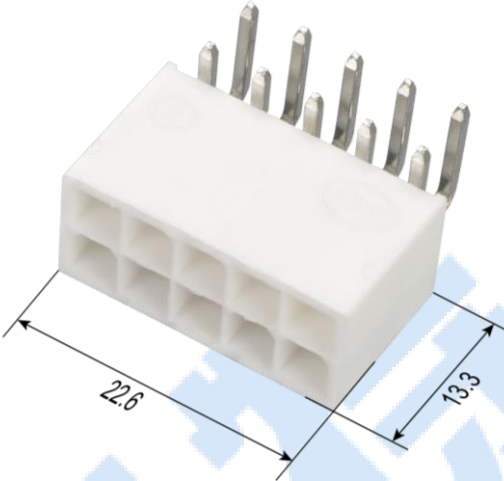
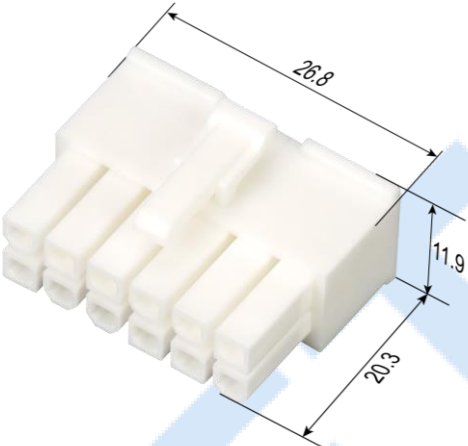
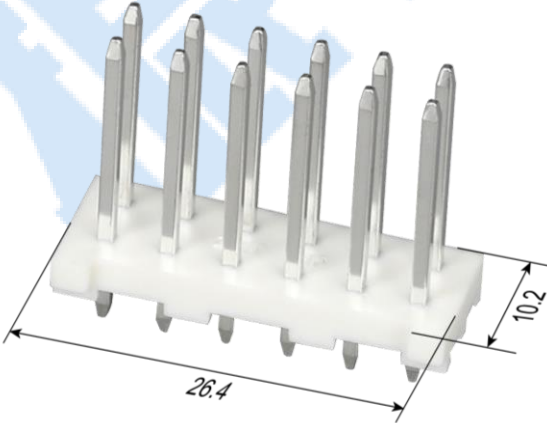
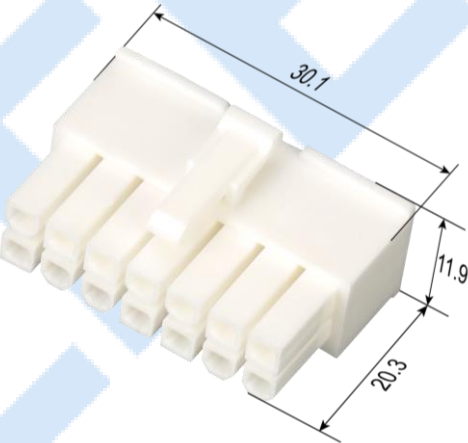
端子 Terminal

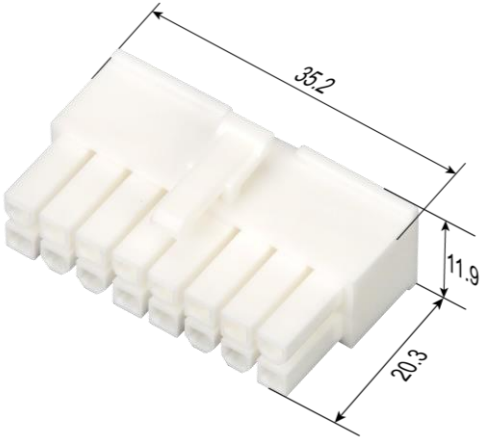
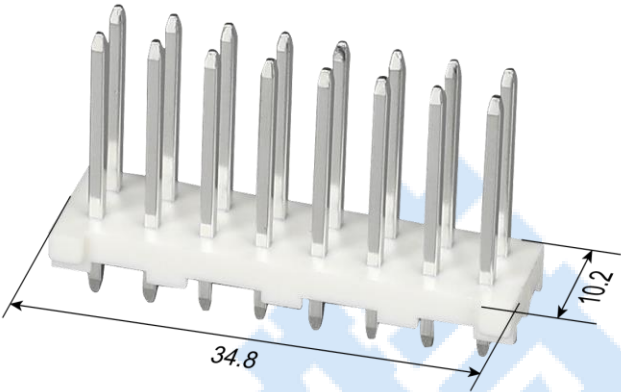
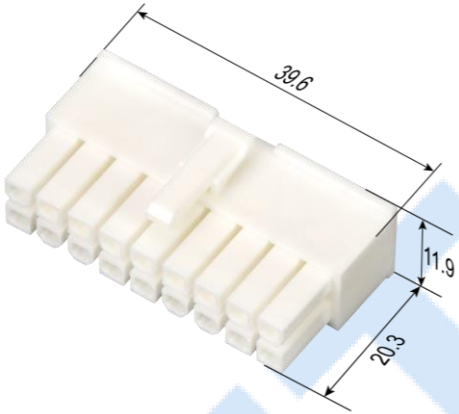
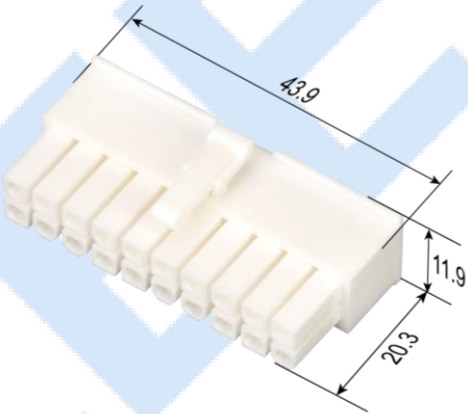
型号 Type	图号 Pic	压线范围 Wire Range		厚度 Thickness	材质 Material	尺寸 Dimension (mm)			对照表 Comparison No.	备注 Remark
		AWG#	mm²			L	W	E		
ZT1012-1.2S	A	22~18	0.3~0.75	0.2	磷铜	14.9	1.8	4.2	插头	
ZT1012-1.2SSL		24~20	0.2~0.5	0.2	磷铜	16.8	1.8	4.2	插头	

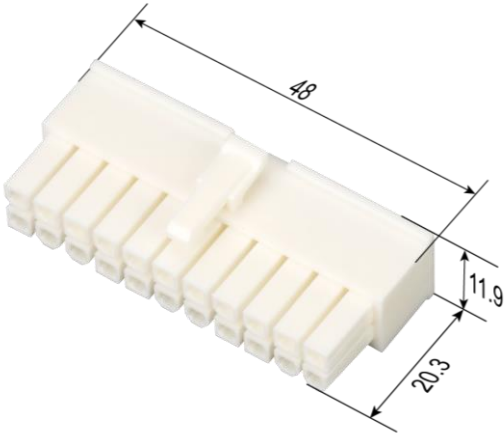
塑料件 Plastic parts

线数 Hole count	插头 Plug for female terminal	针座 Receptacle for male terminal
2	ZT3100(5557-2P) A technical drawing of a white plastic plug component. It has a rectangular shape with a central slot. Dimension lines indicate the width (10), the height of the central slot (7.5), and the overall length (20.3).	

4	ZT3101(5557-4P) 	
6	ZT3102(5557-6P) 	ZT2206-B 
8	ZT3103(5557-8P) 	ZT2207-B 

10	ZT3107(5557-10P) 	5569-10WA 
12	ZT3104(5557-12P) 	ZT2208-B 
14	ZT3105(5557-14P) 	

16	ZT3106(5557-16P) 	ZT2215-B 
18	ZT3108(5557-18P) 	
20	ZT3109(5557-20P) 	

22	ZT3110(5557-22P) 	
24	ZT3111(5557-24P) 